

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 February 2003 (20.02.2003)


PCT

(10) International Publication Number
WO 03/013618 A1

- (51) International Patent Classification⁷: **A61L 9/03**, (72) Inventors: **PEDROTTI, Andrea**; Via Piano Sarca, 12, I-38074 Pietromurata (IT). **ZOBELE, Franco**; Via Adamello, 28, I-38100 Trento (IT). **CAMPEDELLI, Paolo**; Via Divisione Acqui 34, I-38065 Mori (IT). **BALDESSARI, Stefano**; Via Roma 29, I-38052 Caldonazzo (IT).
- (21) International Application Number: **PCT/US02/25027**
- (22) International Filing Date: **7 August 2002 (07.08.2002)**
- (25) Filing Language: **English** (74) Agents: **MILLER, Robert, A.**; S.C. Johnson & Son, Inc., Patent Section, M.S. 077, 1525 Howe Street, Racine, WI 53403-2236 et al. (US).
- (26) Publication Language: **English**
- (30) Priority Data: **01830528.4** **7 August 2001 (07.08.2001)** **EP** (81) Designated States (*national*): **AU, BR, CA, CN, CO, JP, KR, MX, NZ, PL.**
- (71) Applicant: **S.C. JOHNSON & SON, INC.** [US/US]; 1525 Howe Street, Racine, WI 53403-2236 (US). Published: — *with international search report*

[Continued on next page]

(54) Title: **MUTI-FUNCTIONAL ELECTRICAL VAPORIZER**

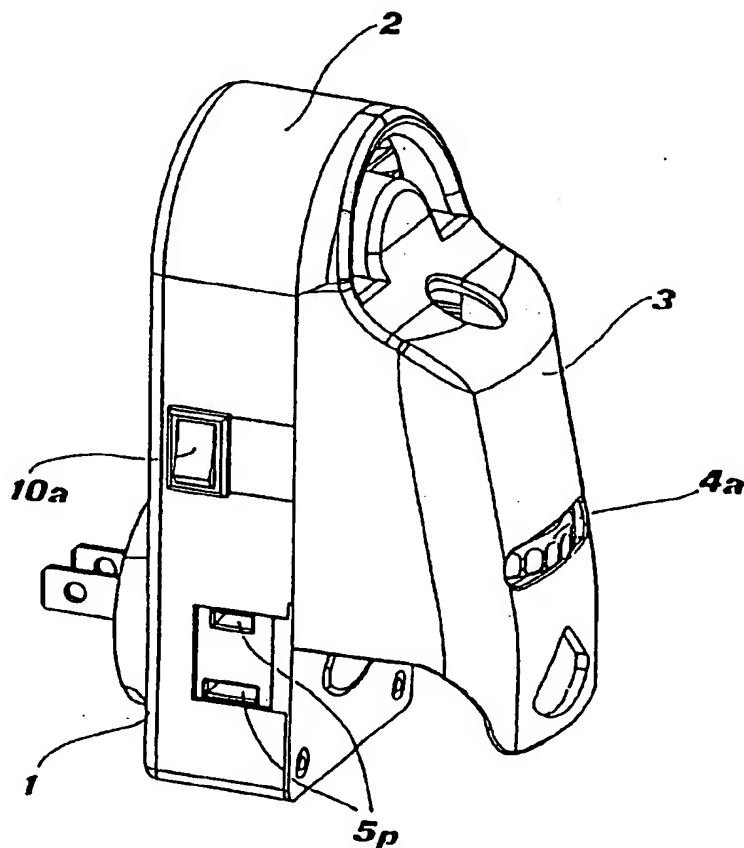

(57) Abstract: A multi-functional electrical vaporizer for a liquid substance includes a bottle for holding the liquid substance, a wick for drawing the liquid substance out of the bottle, an electrical heating device positioned proximate to an upper portion of the wick, an electrical plug assembly, an electrical circuit for powering the electrical heating device, a housing structure with respect to which the bottle is detachably secured and in which at least the electrical plug assembly, the electrical circuit, and the electrical heating device are disposed, and a cover that is joined to and at least partially covers the housing structure. The housing structure, which includes a first shell and a second shell that are joined together, is configured to receive any of a plurality of different additional functional devices. The cover is provided with at least one access window corresponding to whatever additional functional device the housing structure is to be equipped with.

WO 03/013618 A1

BEST AVAILABLE COPY



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MULTI-FUNCTIONAL ELECTRICAL VAPORIZER**BACKGROUND OF THE INVENTION****1. Field of the Invention**

[0001] Our invention relates generally to an electrical vaporizer for a liquid substance, such as an aromatic liquid, an insecticide, or the like. In particular, our invention relates to a multi-functional vaporizer that, in addition to performing the basic function of vaporizing the liquid substance by means of an electrical heating device, can also be equipped with one or more additional functional devices, such as a draft regulator, a wick adjustment mechanism, a fan, a night light, an indicator light, a programmable user interface, or the like.

2. Description of the Related Art

[0002] The worldwide market for electrical vaporizers for use with aromatic liquids, insecticides, and the like is extremely diverse both with respect to the technical specifications of the electrical components of the vaporizer and with respect to the functional capabilities demanded by users. Such diversity in the marketplace causes considerable problems for the manufacturers of these vaporizers, who, on the one hand, must produce different models tailored to meet the specific requirements of each market, yet, on the other hand, are under considerable pressure to reduce production costs in order to keep pace with their competitors.

[0003] As for the technical specifications of the electrical components, the problem does not lie so much in the safety standards of the components, because it is sufficient to adopt for all markets the most stringent regulations from among all the countries in which the vaporizer will be sold. Indeed, the savings that result from producing substantially homogeneous electrical components easily offset any increased costs of using higher quality components than may strictly be necessary.

[0004] Rather, a more difficult problem for manufacturers has to do with the varying market preferences as to which additional functional capabilities the vaporizer should be equipped with. In developing countries, for example, consumers typically want vaporizers capable of performing only very basic functions, such as heating, and

possibly a few other simple features, such as an on/off indicator light, an on/off switch, or an extra electrical socket for replacing the one occupied by the vaporizer. In more advanced or wealthier countries, consumers typically want more complex vaporizers that are equipped with, for example, a fan, a programmable user interface, a night light, or other more sophisticated features.

[0005] Aesthetic appearance is also an important issue with vaporizers, especially wall-mounted ones that are often visibly displayed in one's home or place of work. But while the external appearance of vaporizers should be designed to meet current market preferences, such appearance should be easily and inexpensively modifiable, so that manufacturers (and also consumers) can keep up with the constantly evolving market trends.

[0006] Prior to our invention, the response of vaporizer manufacturers has been to produce and store in inventory a very large number of devices which vary from each other, not only with respect to the intrinsic technical characteristics of each device, but also with respect to the various additional features and aesthetic appearance of the device. Producing and maintaining large inventories, however, prevents manufacturers from reducing their production costs and creates a formidable barrier to further market expansion.

SUMMARY OF THE INVENTION

[0007] In conceiving our invention, we realized that the foregoing problem could be addressed only by radically departing from the conventional wisdom of producing and maintaining large inventories of diverse devices, and, instead, developing a new line of vaporizers having a universal core housing structure that can easily accommodate any of several different functional devices and external designs.

[0008] In one aspect, our invention relates to a multi-functional electrical vaporizer for a liquid substance. The vaporizer includes (i) a bottle for holding the liquid substance, (ii) a wick for drawing the liquid substance out of the bottle, the wick having a lower portion disposed within the bottle and an upper portion extending out of the bottle, (iii) an electrical heating device positioned proximate to the upper portion of the wick, (iv) an electrical plug assembly, (v) an electrical circuit, connected between the electrical plug assembly and the electrical heating device, for powering the electrical heating device, (vi) a housing structure with respect to which the bottle is detachably secured and in which at least the electrical plug assembly, the electrical circuit, and the electrical heating device are disposed, and (vii) a cover that is joined to and at least partially covers the housing structure. The housing structure includes a first shell and a second shell that are joined together, and is configured to receive any of a plurality of different additional functional devices. Meanwhile, the cover is provided with at least

-5-

one access window corresponding to whatever additional functional device the housing structure is to be equipped with.

[0009] In another aspect, our invention relates to a multi-functional electrical vaporizer for dispersing a liquid substance contained in a bottle provided with a wick for drawing the liquid substance out of the bottle and toward an upper portion of the wick. The vaporizer includes (i) an electrical heating device for being positioned proximate to the upper portion of the wick, (ii) an electrical plug assembly, (iii) an electrical circuit, connected between the electrical plug assembly and the electrical heating device, for powering the electrical heating device, (iv) a housing structure in which at least the electrical plug assembly, the electrical circuit, and the electrical heating device are disposed, the housing structure including a first shell and a second shell that are joined together, the housing structure being configured to receive any of a plurality of different additional functional devices, (v) at least one additional functional device disposed within the housing structure, and (vi) a cover that is joined to and at least partially covers the housing structure, the cover including at least one access window corresponding to the additional functional device the housing structure is equipped with. The additional functional device is selected from among the following: (a) a draft regulator, (b) a wick adjustment mechanism for displacing the wick relative to the electrical heating device, (c) a fan, (d) a night light, (e) an indicator light, and (f) a programmable user interface.

[0010] In yet another aspect, our invention relates to a method of manufacturing an electrical vaporizer for a liquid substance. The method includes at least the following steps: (i) forming a housing structure including joinable first and second shells, the housing structure being configured to receive any of a plurality of different additional functional devices, (ii) disposing within the housing structure an electrical plug assembly, an electrical heating device, and an electrical circuit that is connected between the electrical plug assembly and the electrical heating device, (iii) equipping the housing structure with at least one of the additional functional devices, and (iv) providing a cover for at least part of the housing structure, the cover including at least one access window corresponding to the additional functional device the housing structure is equipped with.

[0011] A better understanding of these and other features and advantages of the invention may be had by reference to the drawings and to the accompanying description, in which preferred embodiments of the invention are illustrated and described.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIGS. 1 and 2 are, respectively, rear and front perspective views of a vaporizer according to a first preferred embodiment of our invention.

[0013] FIG. 3 is an exploded view of the vaporizer shown in FIGS. 1 and 2.

[0014] FIG. 4 is a view, similar to that of FIG. 3, in which the vaporizer is provided with an extra electrical socket.

[0015] FIG. 5 is a view, similar to that of FIG. 4, in which the vaporizer is provided with an additional functional device, namely, a fan.

[0016] FIG. 6 is a view, similar to that of FIG. 4, but from a different viewpoint, in which the vaporizer is provided with an additional functional device, namely, a night light.

[0017] FIG. 7 is a view similar to that of FIG. 6, in which the vaporizer is provided with an indicator light as an additional functional device, instead of the night light.

[0018] FIG. 8 illustrates a vaporizer according to a second preferred embodiment of our invention, where, for clarity, the cover has been omitted.

[0019] FIG. 9 is a view of the vaporizer shown in FIG. 8, provided with an extra electrical outlet.

[0020] FIG. 10 is a view of the vaporizer shown in FIG. 9, provided with an additional functional device, namely, an indicator light.

[0021] FIG. 11 illustrates a vaporizer according to a third preferred embodiment of our invention, provided with an additional functional device, namely, a fan. For clarity, the cover has been omitted in FIG. 11:

[0022] FIG. 12 illustrates a vaporizer similar to that illustrated in FIG. 11, in which the fan is replaced by a different additional functional device, namely, a night light.

[0023] FIG. 13 illustrates a vaporizer similar to that illustrated in FIG. 11, in which the fan is replaced by a different additional functional device, namely, a programmable user interface.

[0024] Throughout the figures, like or corresponding reference numerals and/or characters have been used for like or corresponding parts.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] FIGS. 1-7 illustrate a vaporizer according to a first preferred embodiment of our invention. The vaporizer includes a first shell 1 and a second shell 2 that can be joined together in any well-known manner, including rivets, screws, heat-staking, or the like. The first and second shells 1 and 2 together form the core housing structure of the vaporizer. The housing structure contains many of the basic functional components of the vaporizer, as well as one or more additional functional devices. Basic components of the vaporizer include a rotatable electrical plug assembly S, a contact carrier M having several electrical contacts, an electrical heating device R connected to a pair of contacts M_R of the contact carrier M, a bottle F containing the liquid substance to be evaporated, and a wick W for drawing the liquid substance out of the bottle and toward an upper portion of the wick.

[0026] The plug assembly S is of the sliding-contact type and has contacts S_M for engagement with either of two possible corresponding pairs of contacts M_S on the contact carrier M. The pairs of contacts M_S on the contact carrier M are mutually offset by 90° , allowing the plug to be rotated through a range of 360° . This makes the vaporizer easily adaptable for use in both horizontal and vertical electrical sockets, as are found in different parts of the world.

[0027] The vaporizer is completed by a cover 3, which preferably surrounds substantially the entire outer surface of the second shell 2 such that substantially only the cover is visible when looking at the vaporizer head-on. The cover 3 is joined to the housing structure, preferably to the second shell 2, by any suitable fastening means. The cover 3 includes one or more access windows corresponding to whatever additional functional device(s) the vaporizer is equipped with. Apart from these minimal functional considerations, the cover design may be tailored to meet consumers' aesthetic preferences.

[0028] An advantageous feature of our invention is that it permits any of several different additional functional devices to be incorporated in the vaporizer, without requiring any substantial modification to either the core housing structure or the basic functional components of the vaporizer. To that end, the housing structure, in advance, is configured to receive any of the additional functional devices. The design of the cover 3, meanwhile, can be varied depending on the additional functional device(s) that the vaporizer is equipped with and the aesthetic preferences of a particular market. Additional functional devices for the vaporizer may include, for example, a draft regulator, a wick adjustment mechanism, a fan, a night light, an indicator light, a programmable user interface, or the like.

[0029] FIG. 3 illustrates a vaporizer including a draft regulator as an additional functional device. The draft regulator comprises a tube 4 with a partially removed wall

-11-

(as more clearly shown in FIG. 8) and a dial 4a. The tube 4 and the dial 4a are supported within the second shell 2. The wick W extends through the inside of the tube 4, and the dial 4a is accessible through a window in the cover 3. The portion of the wick W directly exposed to the heating device R can be varied by rotating the dial 4a, thereby varying the rate at which the liquid substance is released to the ambient. A similar function can also be achieved through the use of a wick adjustment mechanism (not shown in the drawings), such as disclosed in co-pending U.S. Patent Application No. 09/916,275, the disclosure of which is incorporated herein by reference. Such a wick adjustment mechanism utilizes a cam device to laterally displace the wick, thereby varying the distance between the wick and the heating device. A draft regulator and a wick adjustment mechanism can be used together or as alternatives to each other.

[0030] FIG. 4 illustrates a vaporizer having an extra electrical socket. In this embodiment, a pair of metal strips 5 is provided within the body of the rotating plug assembly S. One end of each strip 5 is press-fitted into engagement with spring contacts on the pins of the plug, while the other end has a clamping system 5p for connecting to an electrical plug. The extra electrical socket is accessible via either of two windows 5f provided in the first shell 1, depending on the position assumed by the plug assembly S.

[0031] FIG. 5 illustrates a vaporizer including a fan as an additional functional device. The fan is housed in the top part of the first and second shells 1 and 2, which are

-12-

provided, for this purpose, with a wide cavity. This cavity houses a printed electrical circuit 10 and a fan assembly 11 that is powered and controlled by the circuit 10. The circuit 10 is in turn powered by means of a pair of contacts M_{10} (which is precisely the same pair of contacts M_R described above in connection with FIG. 3). In this embodiment, the heating device R is connected to the circuit 10 instead of directly to the contact carrier M. The circuit 10 is equipped with a switch 10a that is accessible through a window 10f in the first shell 1.

[0032] FIG. 6 illustrates a vaporizer including a night light 12 as an additional functional device. The night light 12 may be chosen from among various well-known types of commercially-available devices, such as incandescent lamps, neon lamps, LED devices (as shown in FIG. 6), or the like. If desired, a diffusing lens 12a may also be utilized. The electrical connections in this embodiment are identical to those discussed above with respect to FIG. 5.

[0033] FIG. 7 illustrates a vaporizer including a programmable user interface 13 as an additional functional device. In the preferred embodiment shown in FIG. 7, the interface includes three LED devices. The LED devices preferably have a much lower wattage than those used in the night light embodiment, because they are not intended to provide illumination, but rather only signal the different operating modes of the vaporizer. A diffusing lens 13a may also be used in this embodiment, if desired. The

-13-

electrical connections in this embodiment are identical to those discussed above with respect to FIG. 5.

[0034] From the foregoing description, it should be clear that it is possible to modify the number and type of additional functional devices the vaporizer is equipped with without making any significant modification to its core housing structure, including the first and second shells 1 and 2. Instead, the vaporizer can simply be provided with a cover 3 having the desired aesthetic characteristics and only those access windows that are necessary based on the particular additional functional devices that the vaporizer is equipped with. During manufacture of the vaporizer, the additional functional devices are easily inserted into their respective places and connected to the electrical contacts already provided in the first and second shells 1 and 2.

[0035] FIGS. 8-10 illustrate a vaporizer according to a second preferred embodiment of our invention. This vaporizer includes elements similar to those described above with respect to the first preferred embodiment. Again, the vaporizer comprises a first shell 1 and a second shell 2 that are joined together to form the core housing structure of the vaporizer. The vaporizer also includes a cover, which is not illustrated in FIGS. 8-10 for the sake of clarity. As in the first preferred embodiment, the vaporizer includes a rotatable electrical plug assembly S, a contact carrier M having several electrical contacts, an electrical heating device R, a bottle F containing the liquid substance to be evaporated, and a wick W for drawing the liquid substance out of the

bottle and toward an upper portion of the wick. In this embodiment, a pair of flexible electrical cables C connects contacts S_C of the plug assembly S (shown in FIG. 9) to contacts M_C on the contact carrier M. As with the first preferred embodiment, a number of additional functional devices may also be incorporated in the vaporizer shown in FIGS. 8-10.

[0036] FIG. 8, for example, illustrates a vaporizer including a draft regulator, similar to that described above with respect to FIG. 3, as an additional functional device.

[0037] FIG. 9, meanwhile, illustrates a vaporizer having an extra electrical socket. In this embodiment, a pair of metal strips 5 is carried by supports 6 formed on the inside of the first shell 1. One end of each strip 5 is press-fitted into engagement with spring contacts M_5 on the contact carrier M, and the other end of the strip 5 has a clamping system 5p for connecting to an electrical plug. The extra electrical socket is accessible via a window provided in the front of the second shell 2.

[0038] FIG. 10 illustrates a vaporizer including an indicator light 7 as an additional functional device. The indicator light 7 preferably comprises a neon lamp 7 seated adjacent to a window of the second shell 2. The lamp includes contacts that are press-fitted into engagement with spring contacts M_7 on the contact carrier M.

[0039] As those skilled in the art will appreciate, the vaporizer can be equipped with any number of these and other additional functional devices. Such devices can be inserted or removed from the vaporizer as desired, and none the devices is electrically or mechanically dependent on any of the other devices.

[0040] Finally, FIGS. 11-13 illustrate a vaporizer according to a third preferred embodiment of our invention. This vaporizer includes elements similar to those described above with respect to the first and second preferred embodiments. In this embodiment, however, the first and second shells 1 and 2 include an expanded section 8 for housing complex and/or bulky additional functional devices.

[0041] In this embodiment, the heating device R includes a U-shaped portion that surrounds the wick W. A resistor 9 is held within a cavity in the heating device R by a pair of opposing contacts M_R on contact carrier M. The heating device R may comprise any of several well-known heating elements.

[0042] In this embodiment, the vaporizer also comprises, in addition to the basic functions noted above, an extra electrical socket and a draft regulator. Other additional functional devices can be housed inside the expanded section 8. Such devices may include a fan 11 (as shown in FIG. 11), a night light 12 (as shown in FIG. 12), and/or a programmable user interface 13 (as shown in FIG. 13). Each additional functional device is powered by means of a printed electrical circuit 10, which is preferably

-16-

contained within a lower part of the expanded section 8. The circuit 10 is in turn connected to contacts M_{10} on the contact carrier M.

[0043] Our invention thus provides a vaporizer having a universal core housing structure that can be equipped with both basic functional features and one or more additional functional devices, without the need to substantially modify the housing structure itself. Meanwhile, a decorative outer cover, which is provided with access windows corresponding to whatever additional functional device(s) the vaporizer is equipped with, is substantially the only part of the vaporizer that is visible when looking at the vaporizer head-on.

[0044] The embodiments discussed above are representative of preferred embodiments of the present invention and are provided for illustrative purposes only. They are not intended to limit the scope of the invention. Although specific structures, components, circuits, etc., have been shown and described, such are not limiting. Modifications and variations are contemplated within the scope of the present invention, which is intended to be limited only by the scope of the accompanying claims.

-17-

INDUSTRIAL APPLICABILITY

[0045] Our invention relates to a multi-functional vaporizer for use in connection with liquid substances, such as aromatic liquids, insecticides, or the like. In addition to performing the basic function of vaporizing the liquid substance by means of an electrical heating device, the vaporizer can easily and economically be equipped with one or more additional functional devices, such as a draft regulator, a wick adjustment mechanism, a fan, a night light, an indicator light, a programmable user interface, or the like.

-18-

WE CLAIM:

1. A multi-functional electrical vaporizer for a liquid substance, the vaporizer comprising:

a bottle for holding a liquid substance;

a wick for drawing the liquid substance out of the bottle, the wick having a lower portion disposed within the bottle and an upper portion extending out of the bottle;

an electrical heating device positioned proximate to the upper portion of the wick;

an electrical plug assembly;

an electrical circuit, connected between the electrical plug assembly and the electrical heating device, for powering the electrical heating device;

a housing structure with respect to which the bottle is detachably secured and in which at least the electrical plug assembly, the electrical circuit, and the electrical heating device are disposed, the housing structure including a first shell and a second shell that are joined together; and

a cover that is joined to and at least partially covers the housing structure,

wherein the housing structure is configured to receive any of a plurality of different additional functional devices, and the cover is provided with at least one

access window corresponding to whatever additional functional device the housing structure is to be equipped with.

2. The vaporizer of claim 1, wherein the bottle is detachably secured within a space defined between an outer surface of the housing structure and an inner surface of the cover.
3. The vaporizer of claim 1, wherein at least some of the plurality of additional functional devices are electrical, and the electrical circuit of the vaporizer includes at least one electrical connection for connecting any of the electrical additional functional devices thereto.
4. The vaporizer of claim 1, wherein the electrical circuit of the vaporizer includes flexible cables connected between the electrical plug assembly and the electrical heating device.
5. The vaporizer of claim 1, wherein the electrical plug assembly includes a plug that is rotatable through a range of 360°.
6. The vaporizer of claim 1, wherein the plurality of different additional functional devices includes at least one of the following: (i) a draft regulator, (ii) a wick

-20-

adjustment mechanism for displacing the wick relative to the electrical heating device, (iii) a fan, (iv) a night light, (v) an indicator light, and (vi) a programmable user interface.

7. A multi-functional electrical vaporizer for dispersing a liquid substance contained in a bottle provided with a wick for drawing the liquid substance out of the bottle and toward an upper portion of the wick, the vaporizer comprising:

an electrical heating device for being positioned proximate to the upper portion of the wick;

an electrical plug assembly;

an electrical circuit, connected between the electrical plug assembly and the electrical heating device, for powering the electrical heating device;

a housing structure in which at least the electrical plug assembly, the electrical circuit, and the electrical heating device are disposed, the housing structure including a first shell and a second shell that are joined together, the housing structure being configured to receive any of a plurality of different additional functional devices;

at least one additional functional device disposed within the housing structure, the additional functional device being selected from among the following: (i) a draft regulator, (ii) a wick adjustment mechanism for displacing the wick relative to the electrical heating device, (iii) a fan, (iv) a night light, (v) an indicator light, and (vi) a programmable user interface; and

a cover that is joined to and at least partially covers the housing structure, the cover including at least one access window corresponding to the additional functional device the housing structure is equipped with.

8. The vaporizer of claim 7, wherein an outer surface of the housing structure and an inner surface of the cover define a space within which the bottle can be detachably secured.
9. The vaporizer of claim 7, wherein the additional functional device that the housing structure is equipped with is electrical, and the electrical circuit of the vaporizer includes at least one electrical connection for connecting the electrical additional functional device thereto.
10. The vaporizer of claim 7, wherein the electrical circuit of the vaporizer includes flexible cables connected between the electrical plug assembly and the electrical heating device.
11. The vaporizer of claim 7, wherein the electrical plug assembly includes a plug that is rotatable through a range of 360°.

-22-

12. The vaporizer of claim 7, wherein the housing structure is equipped with at least two of the additional functional devices, including at least the wick adjustment mechanism and the fan.
13. A method of manufacturing an electrical vaporizer for a liquid substance, the method comprising the following steps:
- forming a housing structure including joinable first and second shells, the housing structure being configured to receive any of a plurality of different additional functional devices;
 - disposing within the housing structure an electrical plug assembly, an electrical heating device, and an electrical circuit that is connected between the electrical plug assembly and the electrical heating device;
 - equipping the housing structure with at least one of the additional functional devices; and
 - providing a cover for at least part of the housing structure, the cover including at least one access window corresponding to the additional functional device the housing structure is equipped with.
14. The method of claim 13, wherein the forming step involves configuring the housing structure to receive any of a plurality of different additional functional devices including at least one of the following: (i) a draft regulator, (ii) a wick adjustment

mechanism for displacing the wick relative to the electrical heating device, (iii) a fan, (iv) a night light, (v) an indicator light, and (vi) a programmable user interface.

15. The method of claim 14, wherein the equipping step involves equipping the housing structure with at least two of the additional functional devices, including at least the wick adjustment mechanism and the fan.

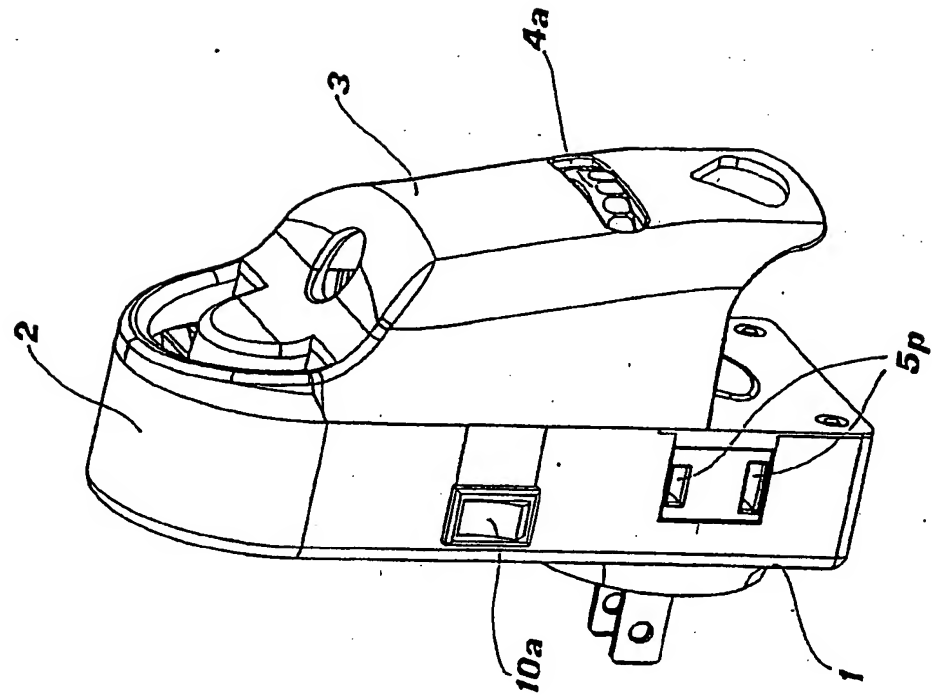


FIG. 2

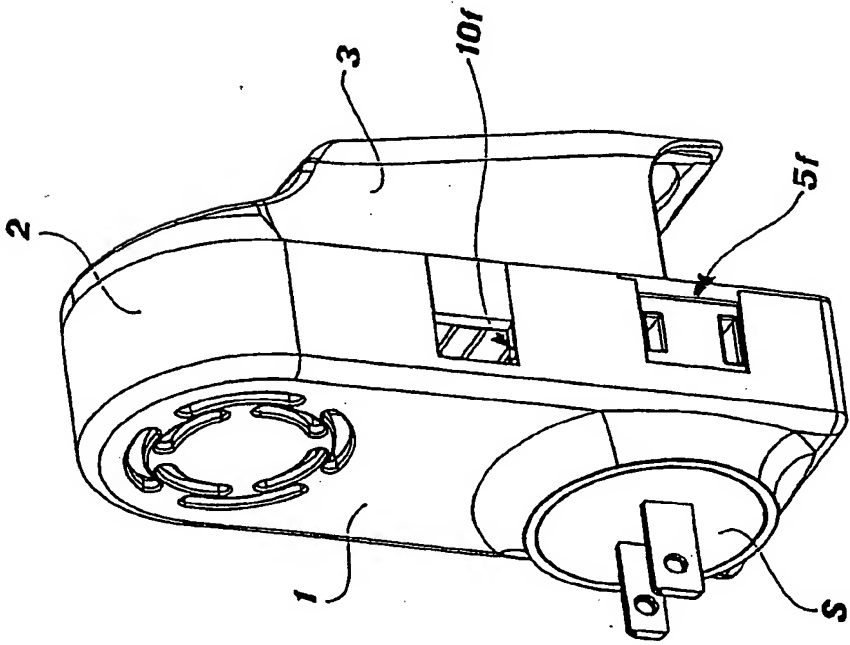


FIG. 1

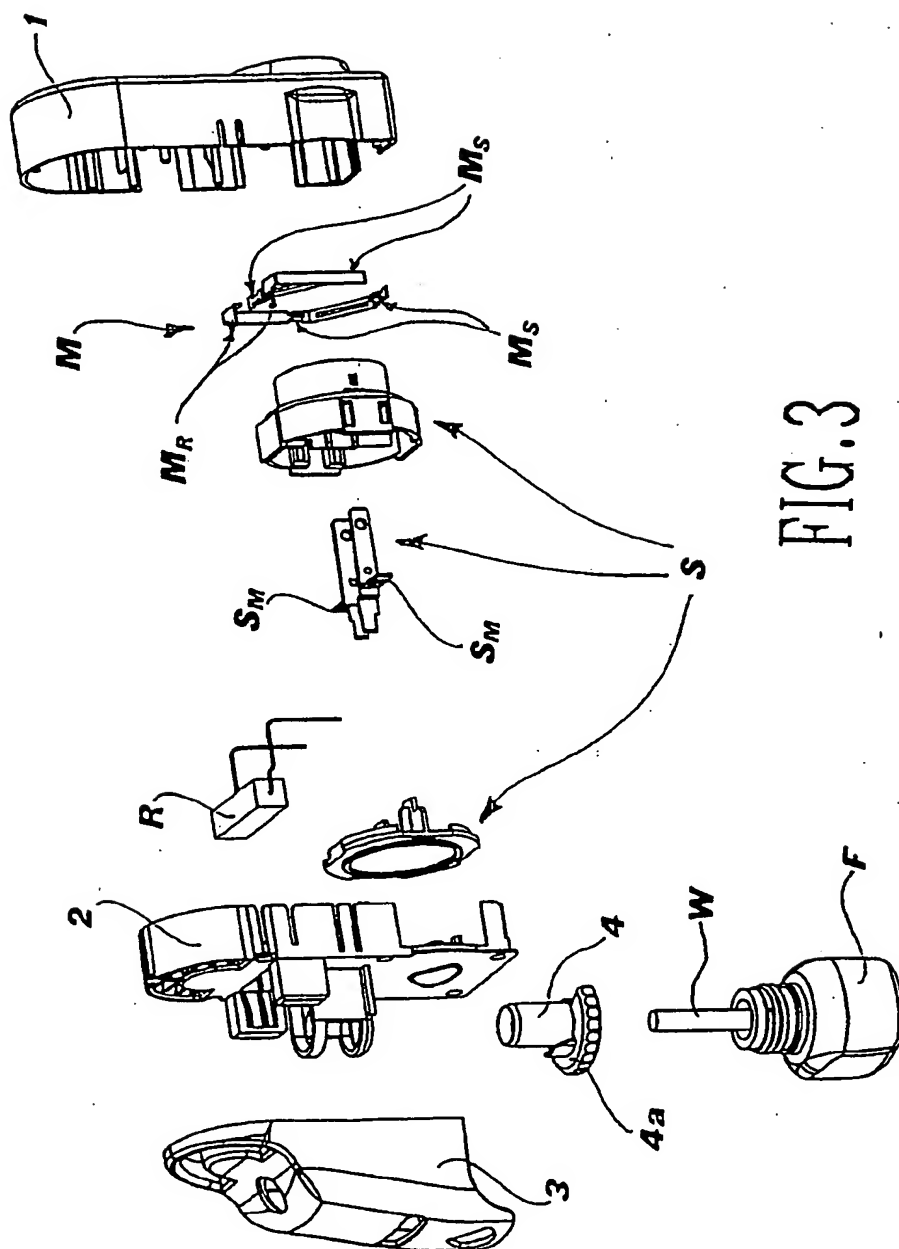
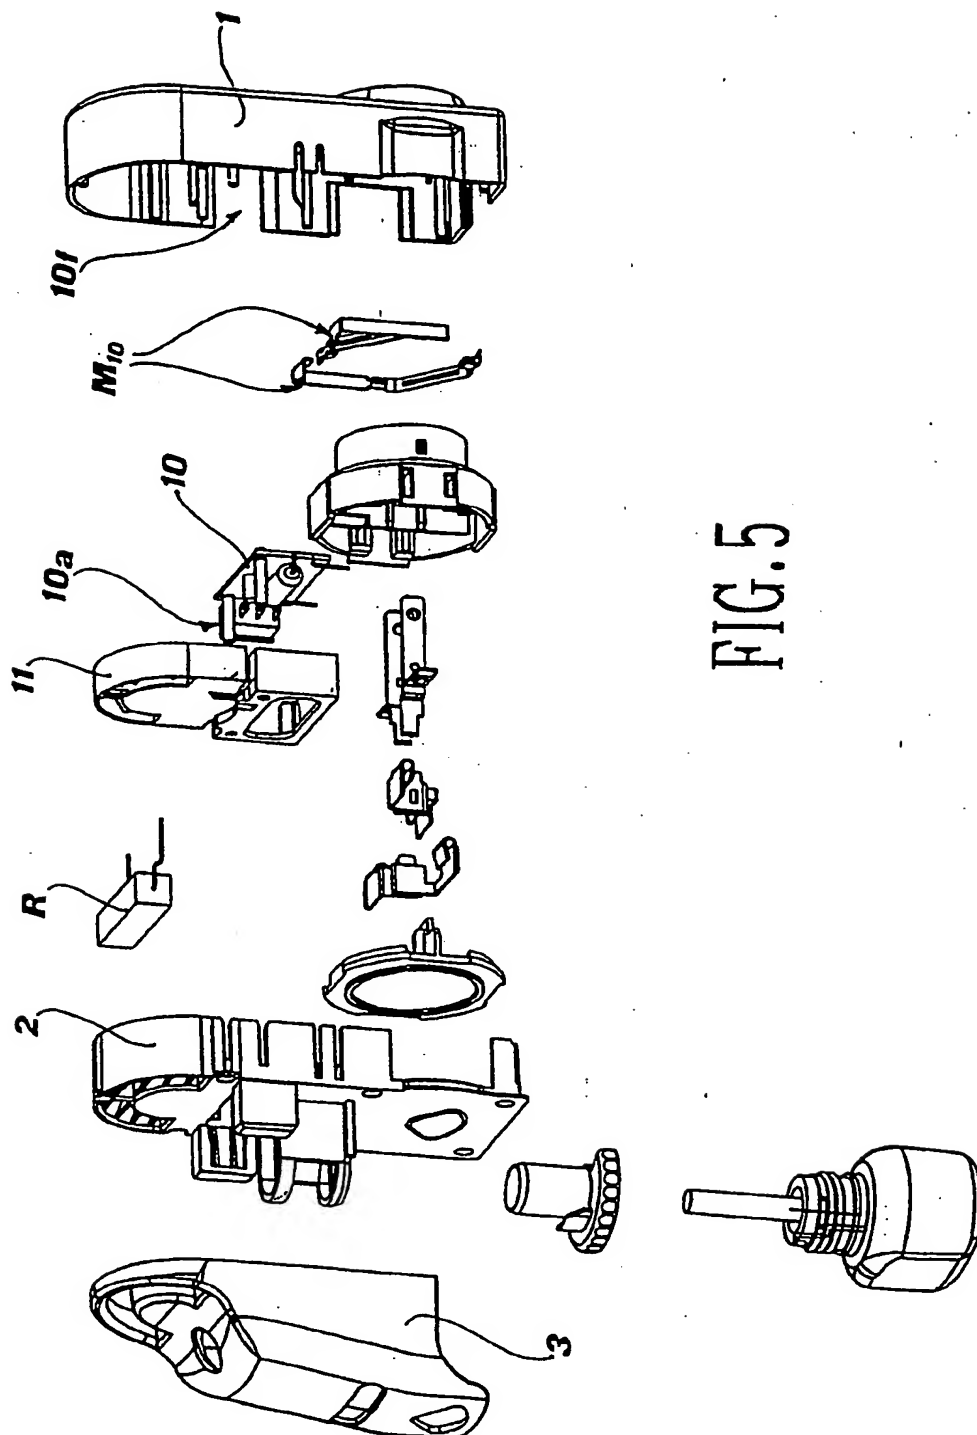


FIG. 3



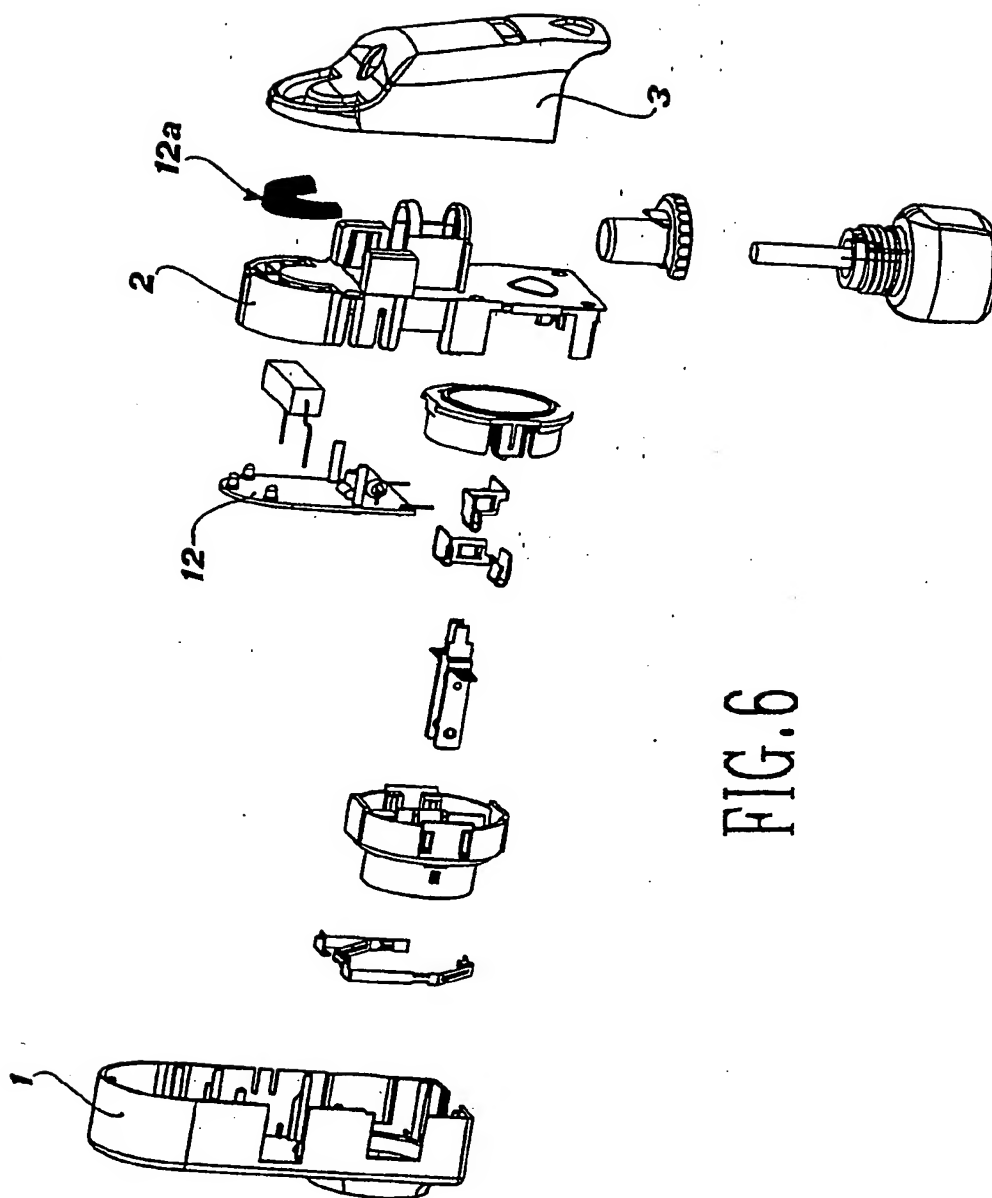


FIG. 6

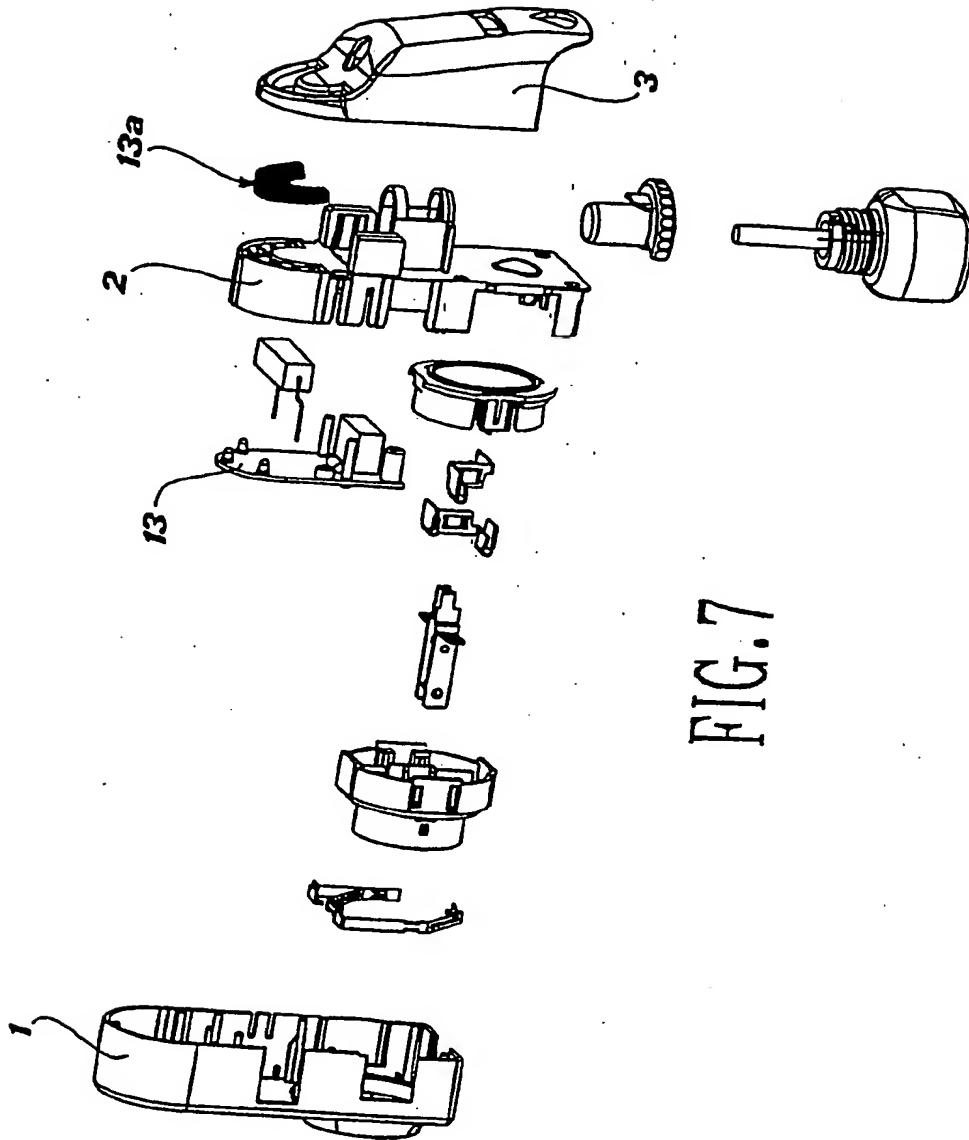
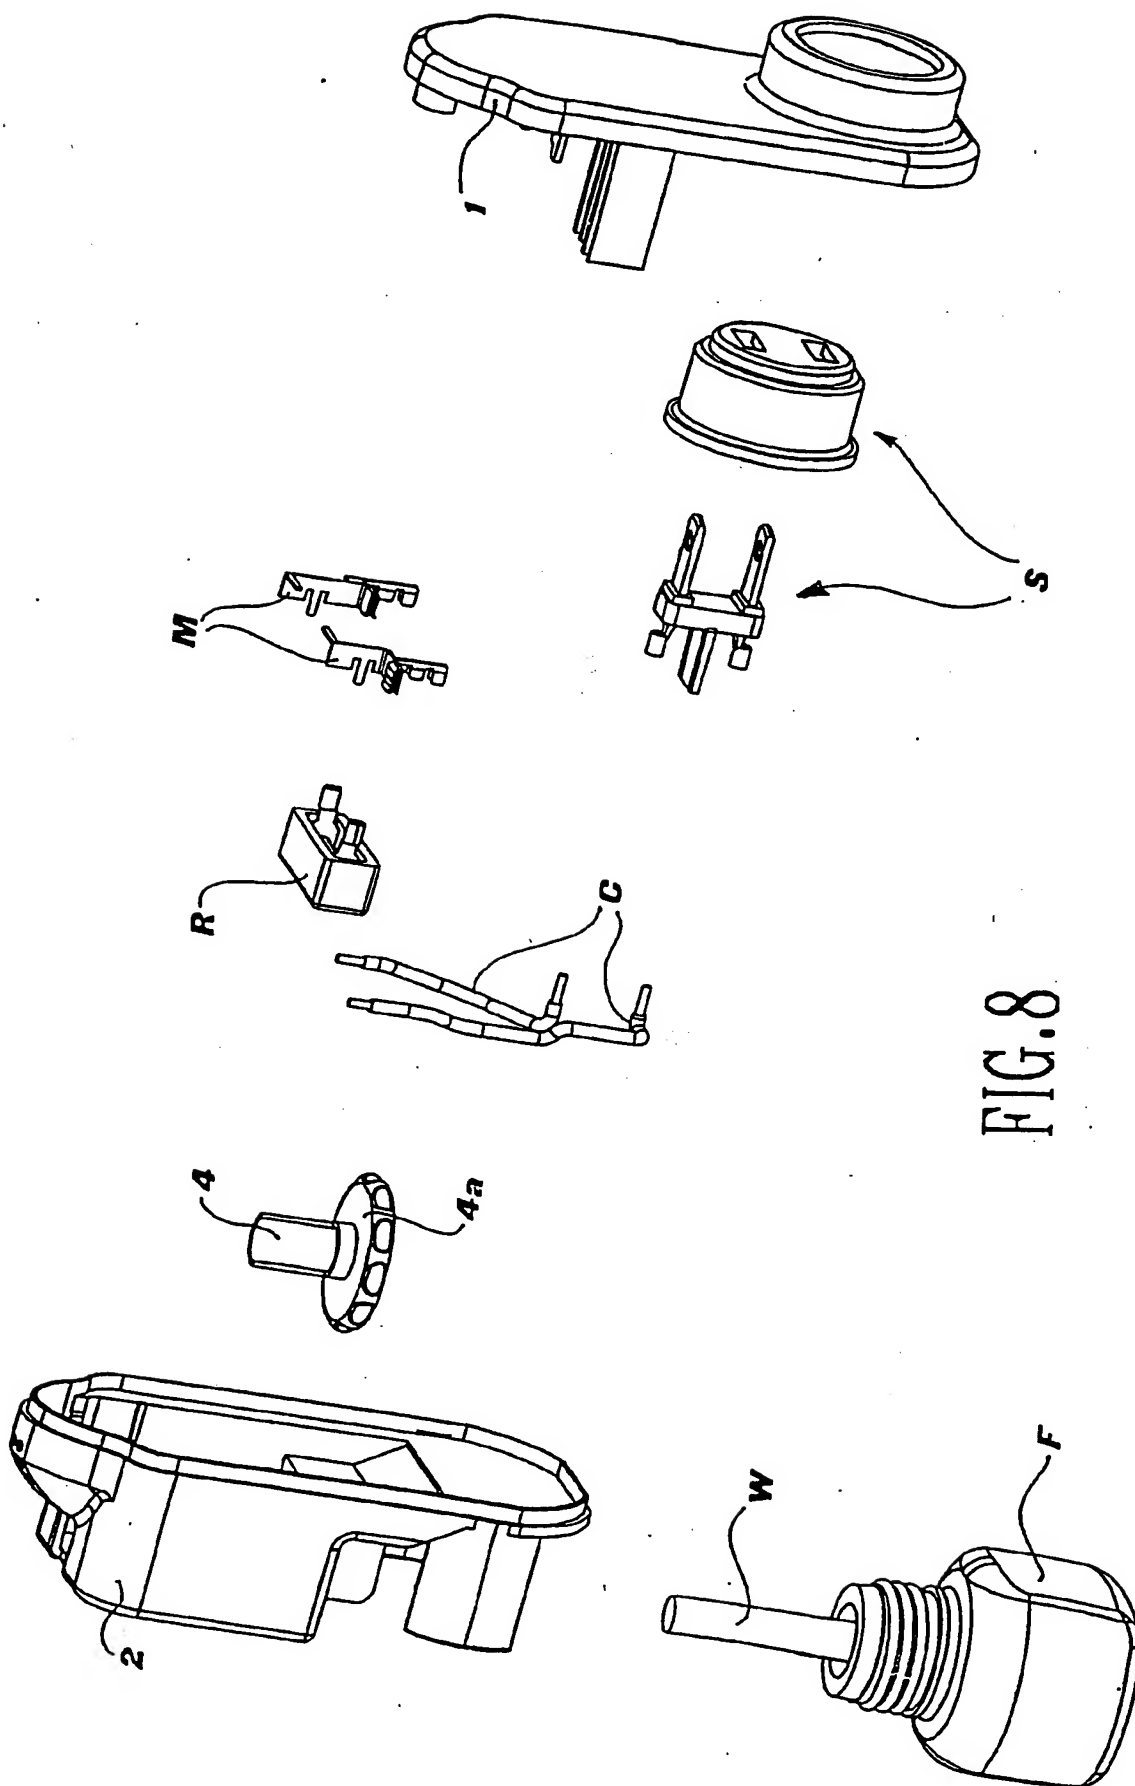
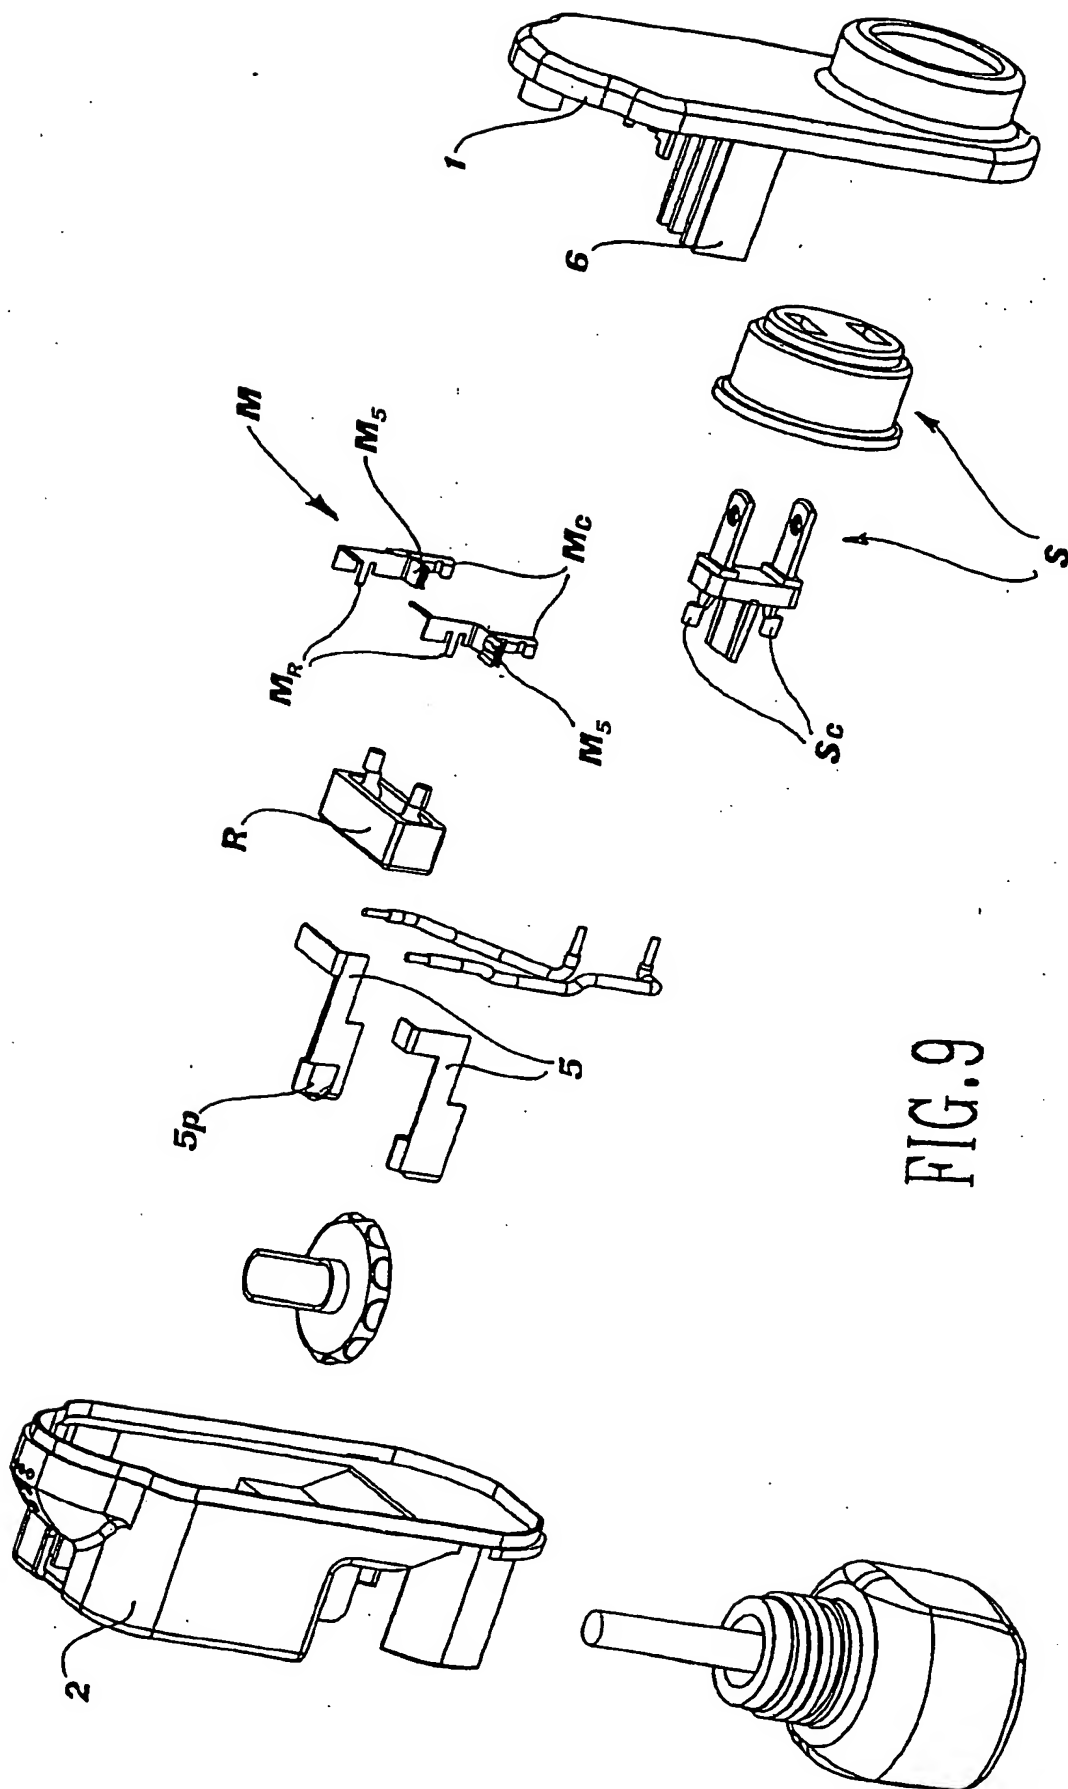


FIG. 7





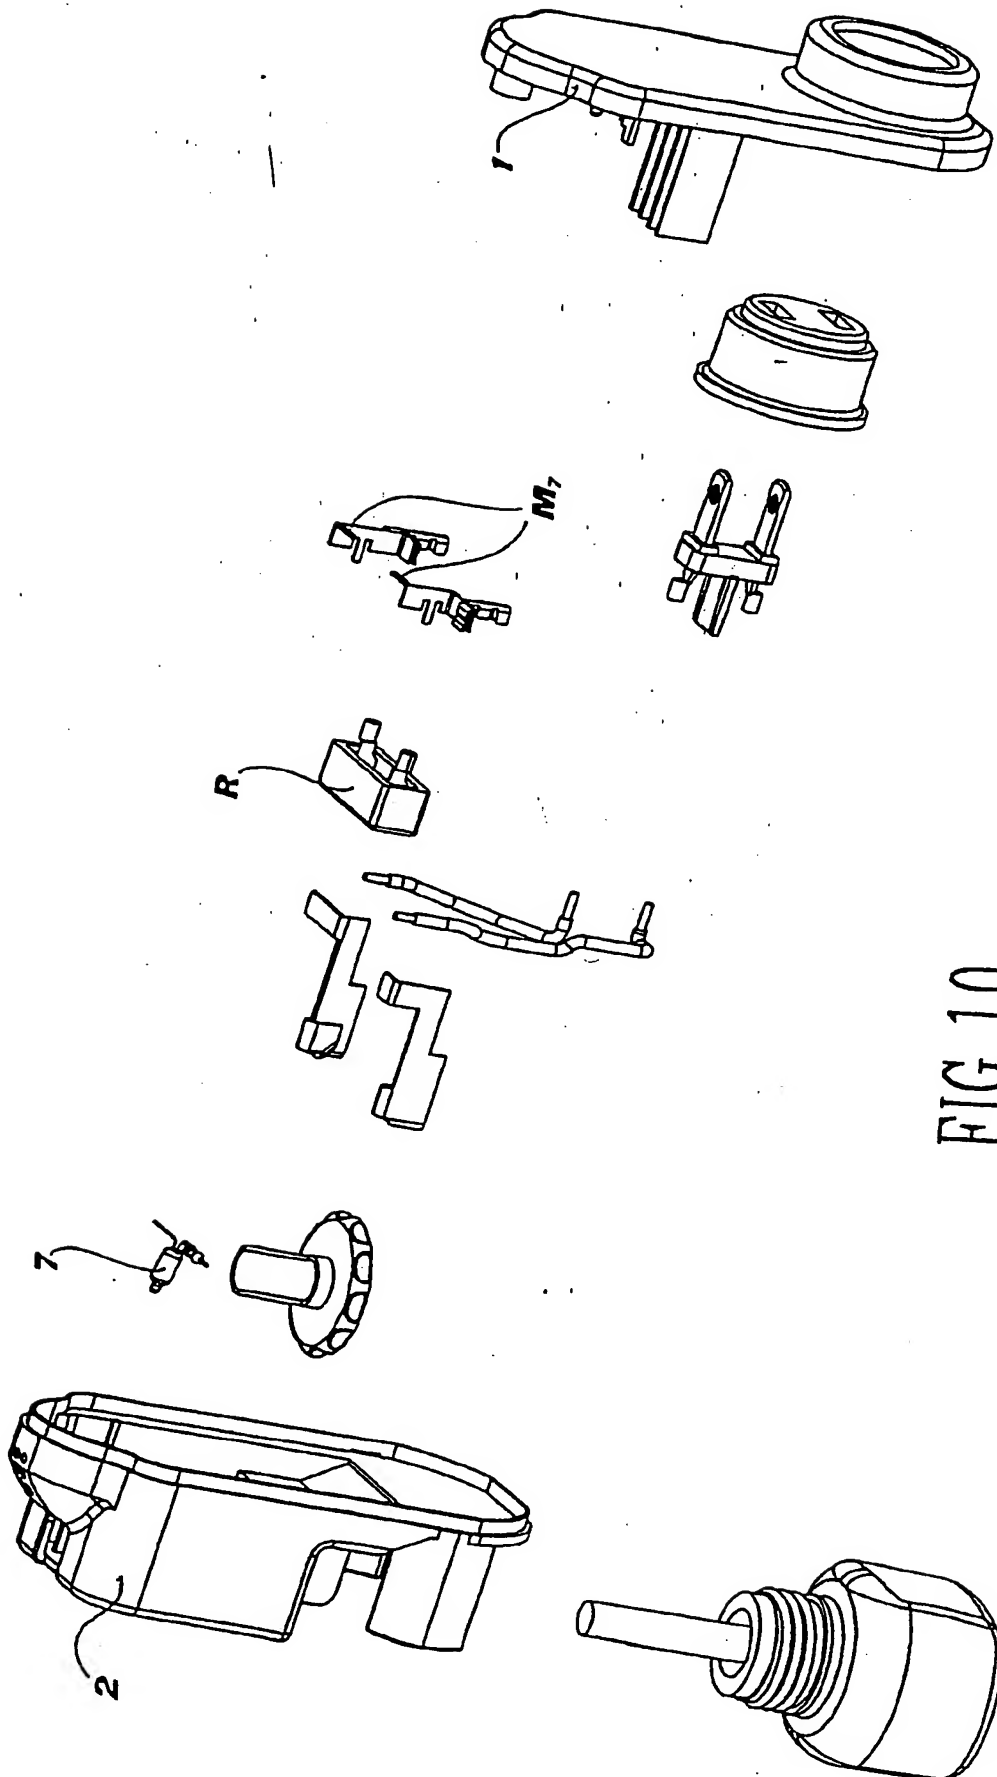
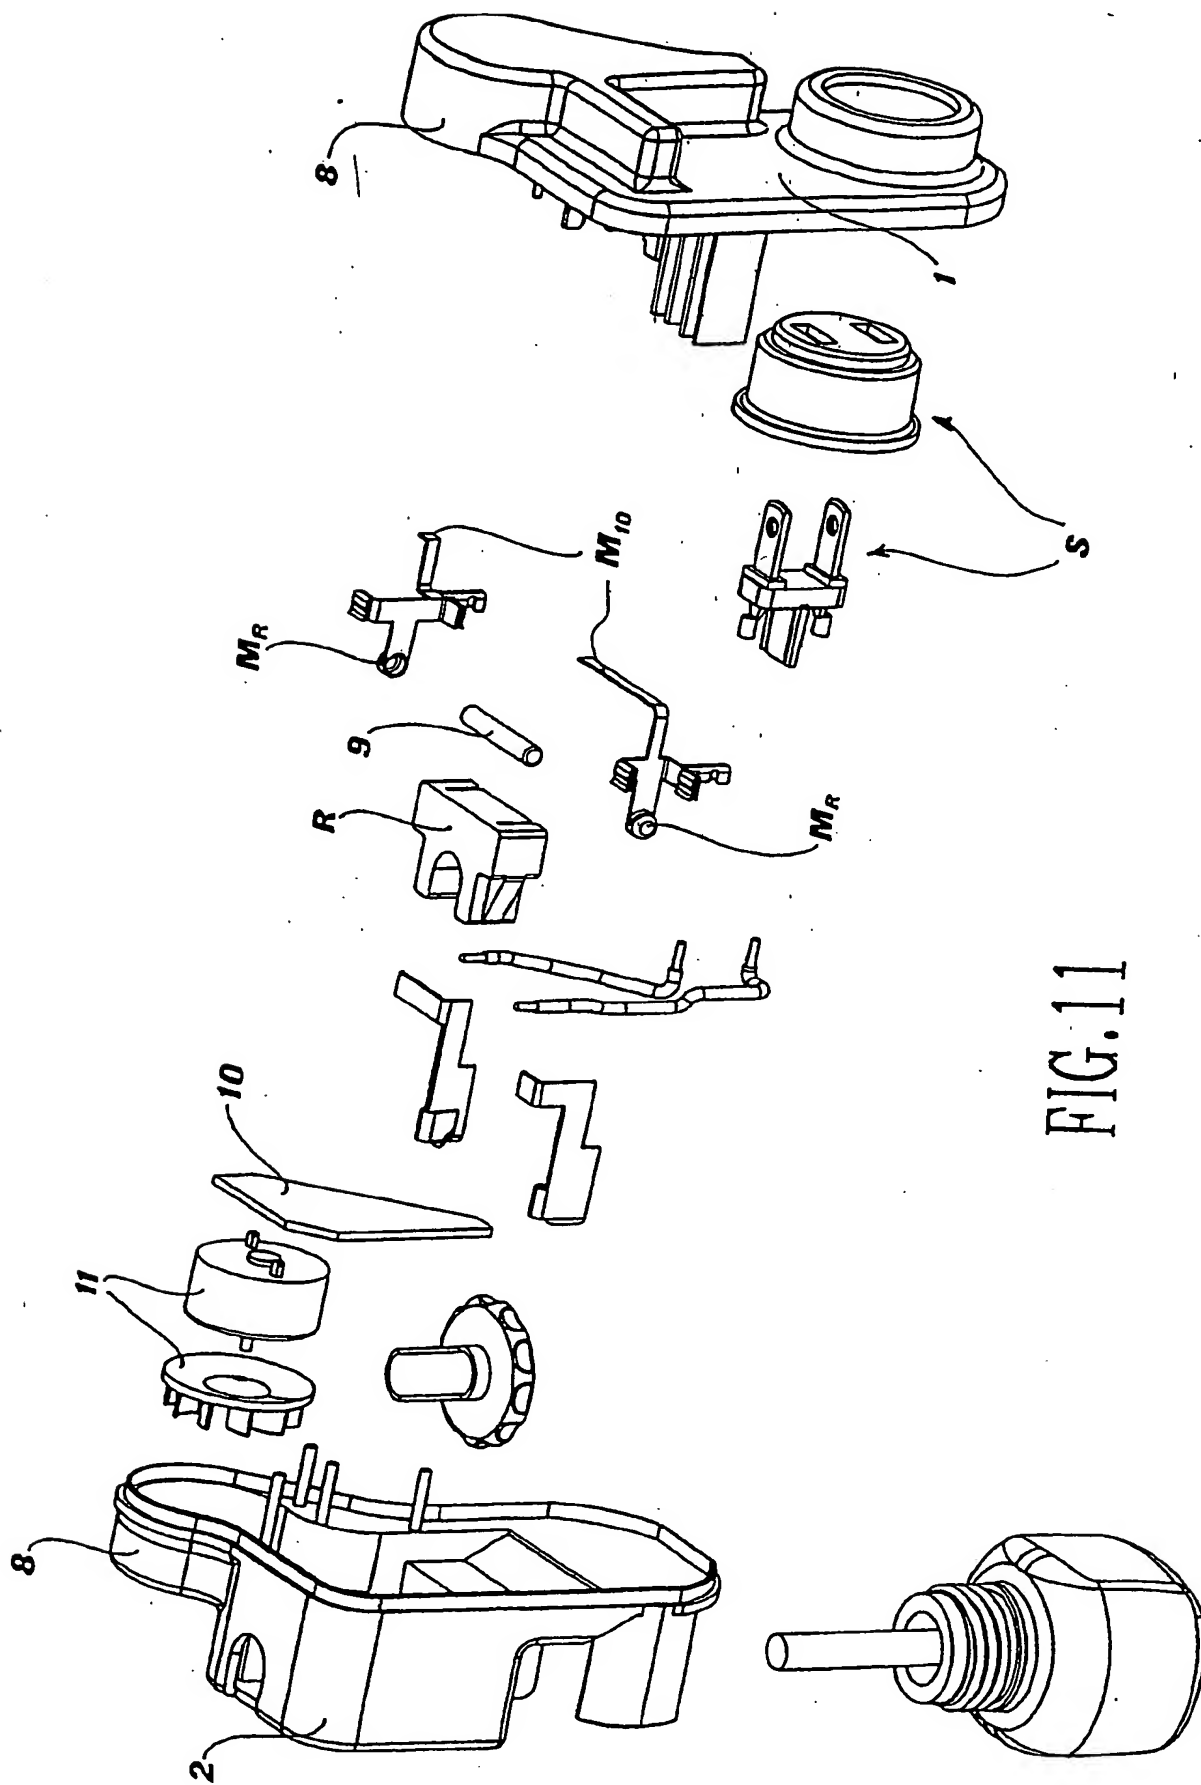


FIG.10



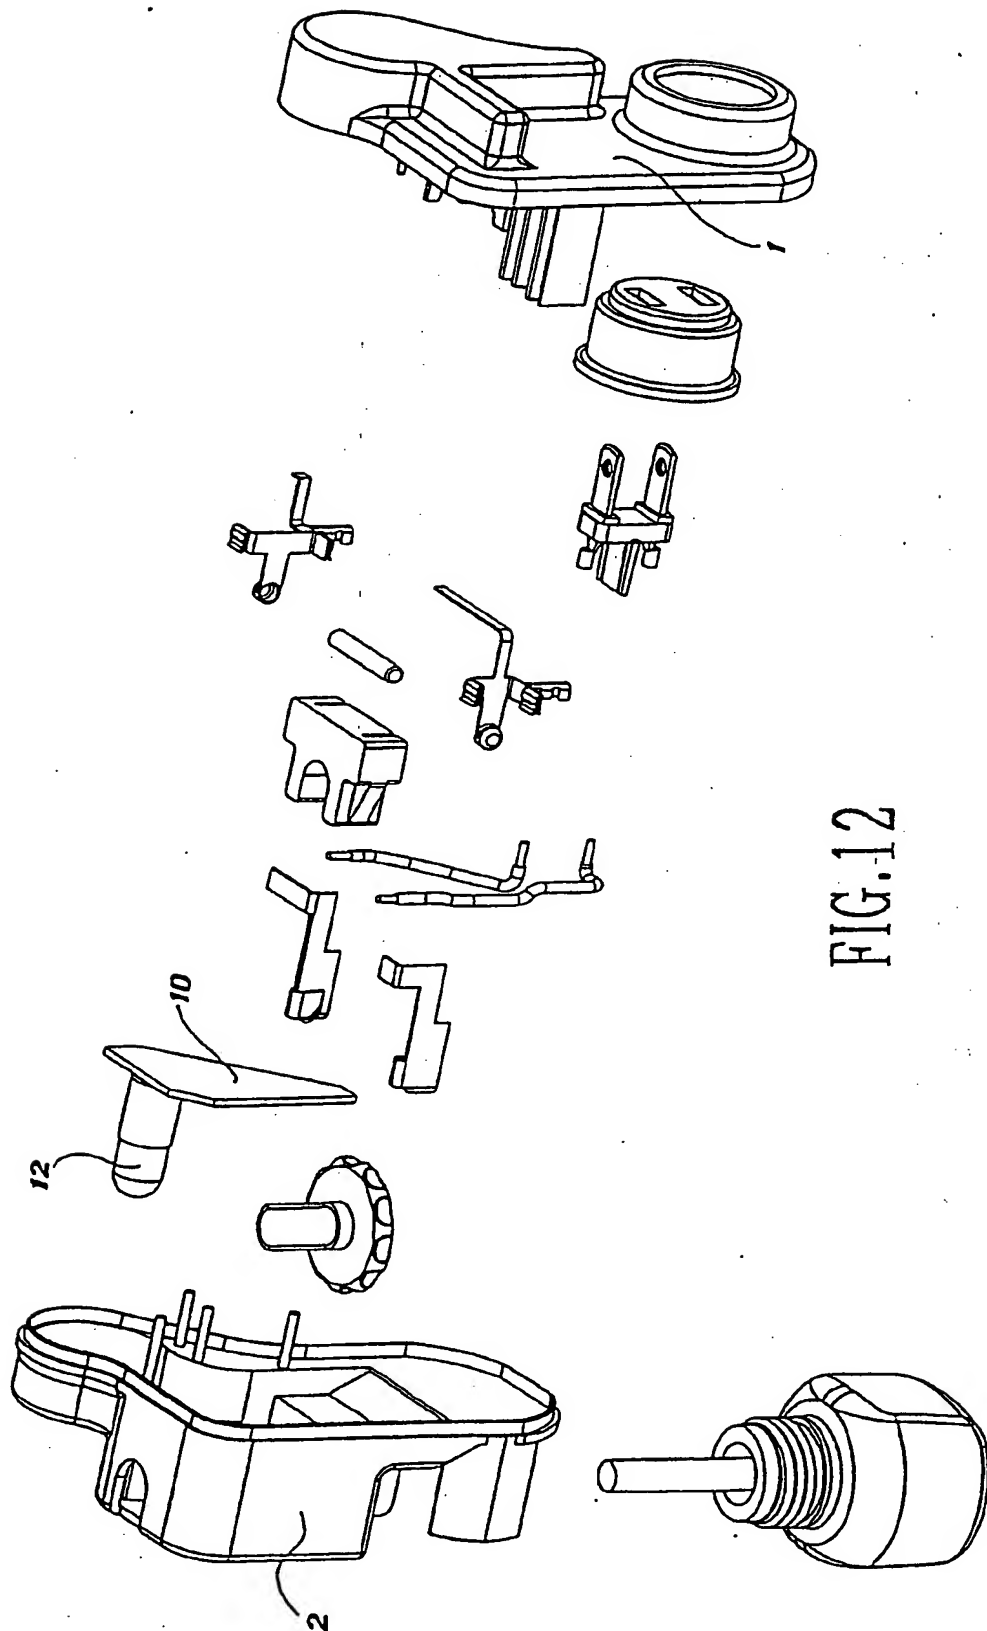


FIG.12

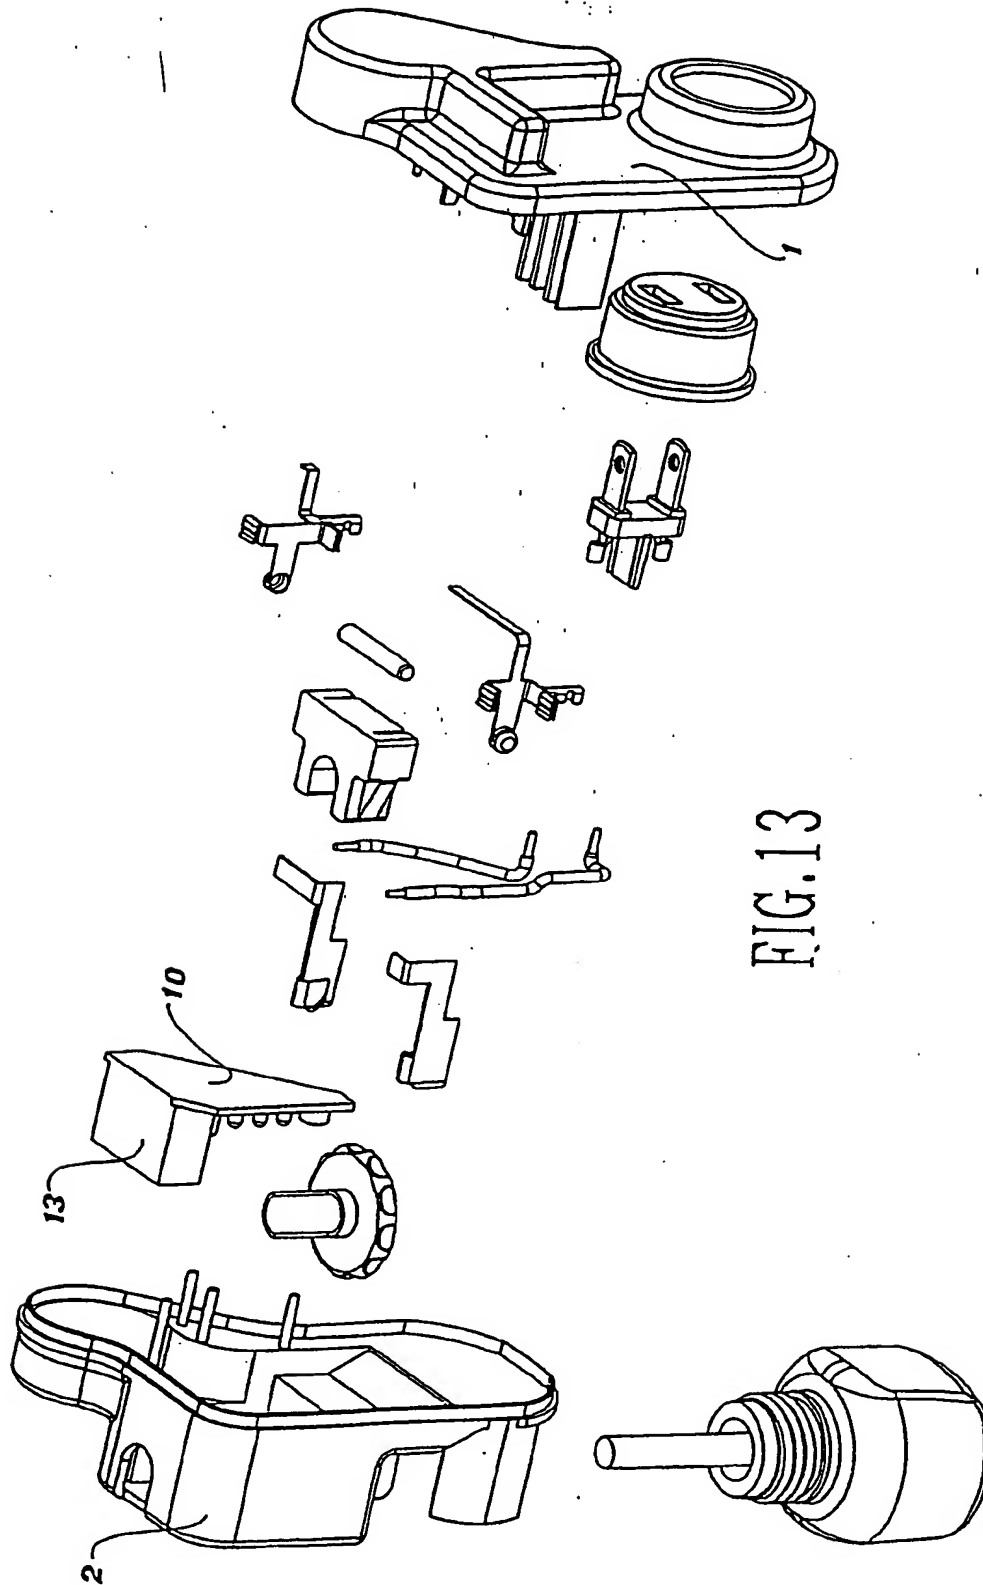


FIG.13

INTERNATIONAL SEARCH REPORT

Int'l Application No.
PCT/US 02/25027

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61L9/03 A01M1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A01M A61L B60H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, FSTA, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 647 053 A (SMITH KEVIN W ET AL) 8 July 1997 (1997-07-08) column 1, line 24 - line 32 column 2, line 13 - line 23 figure 1 claim 1	1-13
A	EP 0 962 132 A (ZOBEL IND CHIM) 8 December 1999 (1999-12-08) column 2, line 58 - column 3, line 20 column 4, line 1 - line 37 figures 12-14 claim 1	1-13
A	US 5 932 147 A (CHEN WEN JYE) 3 August 1999 (1999-08-03) figure 3 claim 1	1-13
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

31 October 2002

Date of mailing of the international search report

12/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Menidjel, R

INTERNATIONAL SEARCH REPORT

Intel onal Application No
PCT/US 02/25027

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 98 46284 A (JOHNSON & SON INC S C) 22 October 1998 (1998-10-22) page 3, line 3 - line 29 figure 1 claim 1</p>	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/25027

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5647053	A	08-07-1997	AU 702408 B2	18-02-1999
			AU 7246696 A	30-04-1997
			BR 9610894 A	28-09-1999
			CN 1199346 A	18-11-1998
			EP 0854736 A1	29-07-1998
			JP 2000501167 T	02-02-2000
			NZ 319851 A	30-08-1999
			WO 9713539 A1	17-04-1997
			ZA 9608556 A	17-06-1997
EP 0962132	A	08-12-1999	IT MI981276 A1	06-12-1999
			EP 0962132 A1	08-12-1999
US 5932147	A	03-08-1999	NONE	
WO 9846284	A	22-10-1998	AU 6975798 A	11-11-1998
			WO 9846284 A1	22-10-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)